


STANDARD PATTERN No.4
SCREWED & FLANGED To BS: 10 TABLE 'D'

- Maximum Working Pressure : 10.55Kg/cm²(150psig)
- Hydraulic Test Pressure : 21.1Kg/cm²(300psig)
- Air Test Pressure : 10.55Kg/cm²(150psig)

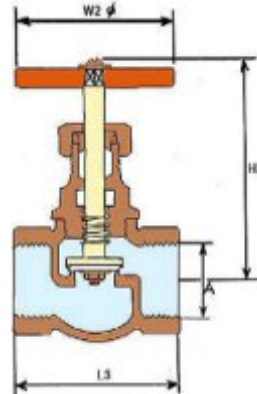

MATERIALS		
Component	Material	Specifications
Disc	Leaded Tin Bronze	IS:318 LTB-2
Disc Nut	Leaded Tin Bronze	IS:318 LTB-2
Disc Face	Teflon / Neoprene	PTFE
Hand Wheel	Cast Iron	IS:210 FG 200
Spindle	Stainless Steel	AISI-410
	Forged Brass	IS:6912 FLB
Gland	Leaded Tin Bronze	IS:318 LTB-2
Gland Nut	Leaded Tin Bronze	IS:318 LTB-2
Gland Packing	Teflon (PTFE)	PTFE
Bonnet	Leaded Tin Bronze	IS:318 LTB-2
Body	Leaded Tin Bronze	IS:318 LTB-2

DIMENSIONS					
Nominal Size		A	L3	H2	ØW2
Inch	MM				
1/4"	8	1/4"BSP	42	60	-
3/8"	10	3/8"BSP	42	60	-
1/2"	15	1/2" BSP	49	80	49
3/4"	20	3/4" BSP	55	88	52
1"	25	1" BSP	69	96	59
1-1/4"	32	1-1/4" BSP	78	112	67
1-1/2"	40	1-1/2" BSP	83	117	79
2"	50	2" BSP	104	134	85
2-1/2"	65	2-1/2" BSP	120	164	110
3"	80	3" BSP	138	190	133
4"	100	4" BSP	190	221	149