



**BRONZE**

**WATER/LIQUID LEVEL GAUGE**


SCREWED ENDS TO MALE BSP/NPT, FOR USE ON STORAGE TANKS, RESERVOIRS, BOILERS AND OTHER SIMILAR INSTALLATIONS

MAXIMUM WORKING PRESSURE : 7kg/cm<sup>2</sup> (100 psig)

HYDRAULIC TEST PRESSURE : 14.06kg/cm<sup>2</sup> (200 psig)

**MATERIALS**

Part No.	PART NAME	MATERIAL	SPECIFICATION
1	UPPER BODY	BRONZE	BS:1400 LG2
2	RUBBER CONE	SYNTHETIC RUBBER	BS : 2752 Gr. C60
3	UNION NUT	BRONZE	BS:1400 LG2
4	LOWER BODY	BRONZE	BS:1400 LG2
5	O - RING	SYNTHETIC RUBBER	BS : 2752 Gr. C60
6	DRAIN NUT	BRASS	Cz114 of BS:2872 Or 2874
7	HANDWHEEL NUT	M.S	BS:916
8	IDENTIFICATION PLATE	ALUMINIUM	
9	HANDWHEEL	CAST IRON	BS:1452 Gr. 220
10	STEM	BRASS	Cz114 of BS:2872 Or 2874
11	GLAND	BRONZE	BS:1400 LG2
12	PACKING NUT	BRONZE	BS:1400 LG2
13	TUBE	GLASS	
14	GLAND PACKING	TEFLON	PTFE

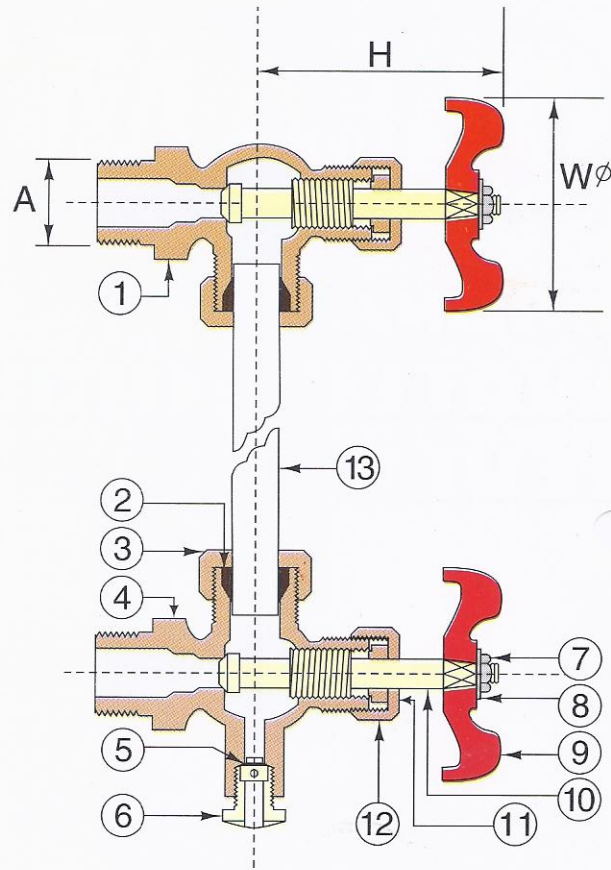

DIMENSIONS in mm.

NOMINAL SIZE		A	L	G
INCH	MM			
1/2"	15	1/2" BSP	59	54
3/4"	20	3/4" BSP	59	54

**AFTER SALES SERVICE**

A team of qualified and experienced Engineers and Technicians is available for efficient after sales service.

**GUARANTEE**

All Valves are guaranteed against manufacturing defects for a period of 18 months from the date of supply or 12 months from the date of installation whichever ends earlier. However our liability is limited to repair/replacement of complete valve or defective parts as found suitable.

**IMPORTANT :**

Due to continuous development programme, design and Data in this leaflet are subject to change without any notice.

Manufactured By :  
**V.K. VALVES PVT. LTD. (INDIA)**

e-mail: utam@vsnl.com, info@vk-utam.com

website : www.vk-utam.com