



AN ISO 9001:2015 CERTIFIED COMPANY

Horizontal Check Valve

UV-27-S

FEATURES :

- Standard Pattern
- Screwed In Bonnet
- Guided Plug Type
- Integral Seat
- Renewable Disc.

APPLICATION :


- Air, Steam, Water

TECHNICAL DATA :

Working Pressure	PN-25
Body Test Pressure	37.5 Bar Hyd.
Seat Test	27.5 Bar Hyd.
End Details	Screwed Female BSP Parallel Threads to BS:21



UTAM Horizontal Check Valve

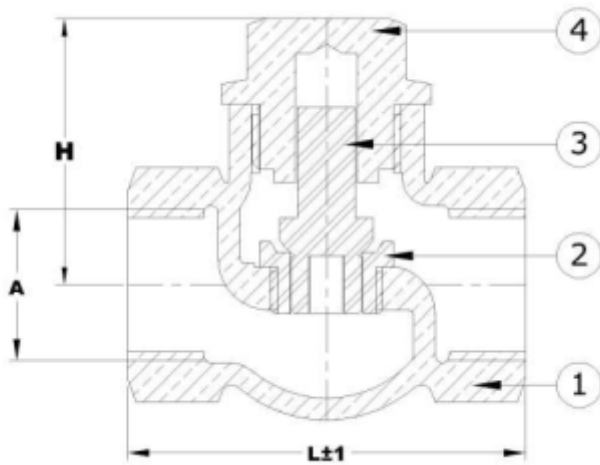

STANDARD MATERIAL COMBINATION

S NO.	COMPONENT	MATERIAL	STANDARD
1	BODY	BRONZE	BS:1400 LG2
2	SEAT RING	STAINLESS STEEL	AISI-410
3	DISC	STAINLESS STEEL	AISI-410
4	BONNET	BRONZE	BS:1400 LG2

Dimensions (in mm)

Size	L	A	H~
15	55	1/2" BSP	38
20	67	3/4" BSP	44
25	79	1" BSP	51
32	88	1-1/4 BSP"	52
40	101	1-1/2 BSP"	62
50	123	2" BSP	77
65	135	2-1/2" BSP	88
80	156	3" BSP	93
100	186	4" BSP	110

our associates



V.K. Valves Pvt. Ltd.

Regd. Office & Works: C-106, Focal Point Extension, Jalandhar-144 004 India.
 Phones: Off.: 91-181-5001947, 5051947 Fax No.: 91-181-2600176, 5083349
 E-mail: techno@vtm-utam.com, info@vk-utam.com

Website : www.vtm-utam.com

Due to continuous development program, design and data in this leaflet are subject to change without prior notice.

Authorized reseller's stamp

